



Geo6X SP


Multi-functional for versatile levelling jobs

the new multi-line lasers Geo6X are our innovative tools for professional construction sites. 3 x 360°-Laser lines form 6 laser crosses with an outstanding visibility. The Geo6X product family comprises 3 models: **Geo6X SP**, **Geo6X SP KIT** as well as the **Geo6X SP GREEN KIT**.

- 3 x 360°-Laser lines
- Compact & rubberized housing
- Outstanding visibility of the laser lines up to Ø 60 / Ø 80 m
- Li-Ion battery for convenient operation (Geo6X SP KIT/ GREEN KIT)
- Full kit with Li-Ion batteries, charger, wallmount and container
- Self-levelling function can be locked for manual use (inclined applications)

Geo6X SP Art.-No.: 534000

Geo6X SP KIT Art.-No.: 534100

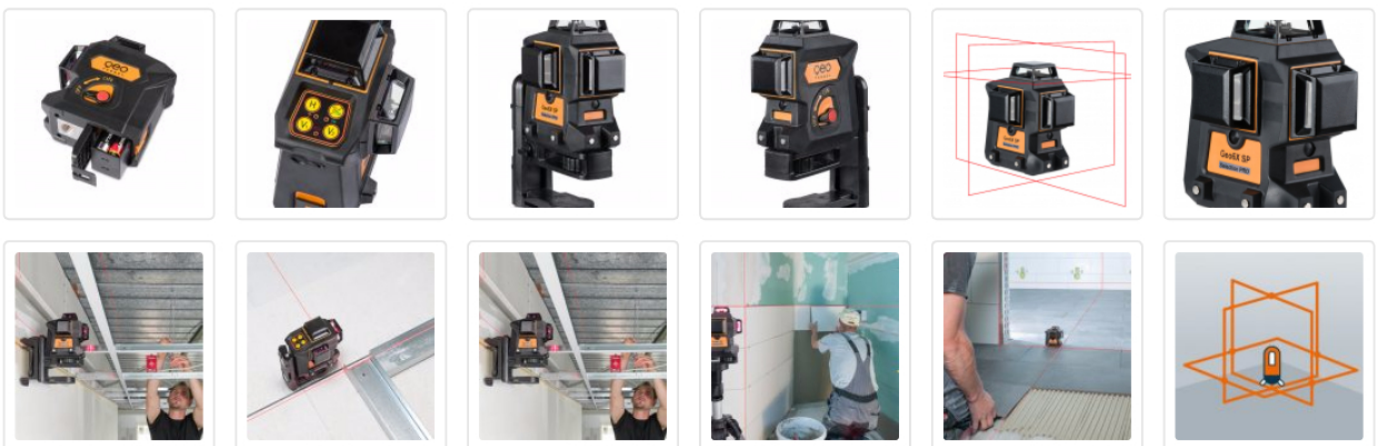

Geo6X SP

TECHNICAL DATA

Self-levelling range: $\pm 3^\circ$
Accuracy: ± 2 mm / 10 m
Laser diode / class: red / 2
Working range* (radius): \varnothing 60 m
Working range with receiver (radius): \varnothing 120 m
Operating time / Power supply: 16 h / alkaline
Dust/waterprotection: IP 54
Temperature range: -10°C - $+45^\circ\text{C}$
Size: 140 x 130 x 80 mm
Weight (instrument with battery): 0,8 kg
<i>*depending on room illumination</i>

FEATURES

3 x 360°-Laser lines - form 6 laser crosses -
Laser lines switchable separately
Plumbing function Laser plane distance to wall/ceiling min. 12 mm
Magnets at the front and side for connection to dry wall track
Use with receiver (optional)
Self-levelling function can be locked for manual use (inclined applications)
5/8" & 1/4" connection at the instruments bottom
The Geo6X can be operated with both battery box and Li-Ion battery

SUPPLIED WITH

4 x Alkaline batteries
Magnetic target
Softbag

Geo6X SP KIT

TECHNICAL DATA

Self-levelling range: $\pm 3^\circ$
Accuracy: ± 2 mm / 10 m
Laser diode / class: red / 2
Working range* (radius): \varnothing 60 m
Working range with receiver (radius): \varnothing 120 m
Operating time / Power supply: 20 h / Li-Ion
Dust/waterprotection: IP 54
Temperature range: -10°C - $+45^\circ\text{C}$
Size: 140 x 130 x 80 mm
Weight (instrument with battery): 0,8 kg
<i>*depending on room illumination</i>

FEATURES

3 x 360°-Laser lines - form 6 laser crosses -
Laser lines switchable separately
Plumbing function Laser plane distance to wall/ceiling min. 12 mm
Magnets at the front and side for connection to dry wall track
Use with receiver (optional)
Self-levelling function can be locked for manual use (inclined applications)
5/8" tripod connection at the instruments bottom
The Geo6X can be operated with both battery box and Li-Ion battery
Multi-functional mount - magnets on the back - strap attachment - height adjustable - 5/8" & 1/4" connection

SUPPLIED WITH

Multi-functional mount
Magnetic target
Li-ion battery, charger
Charger with USB 3.0 cable

Battery case for alkaline batteries

Container